
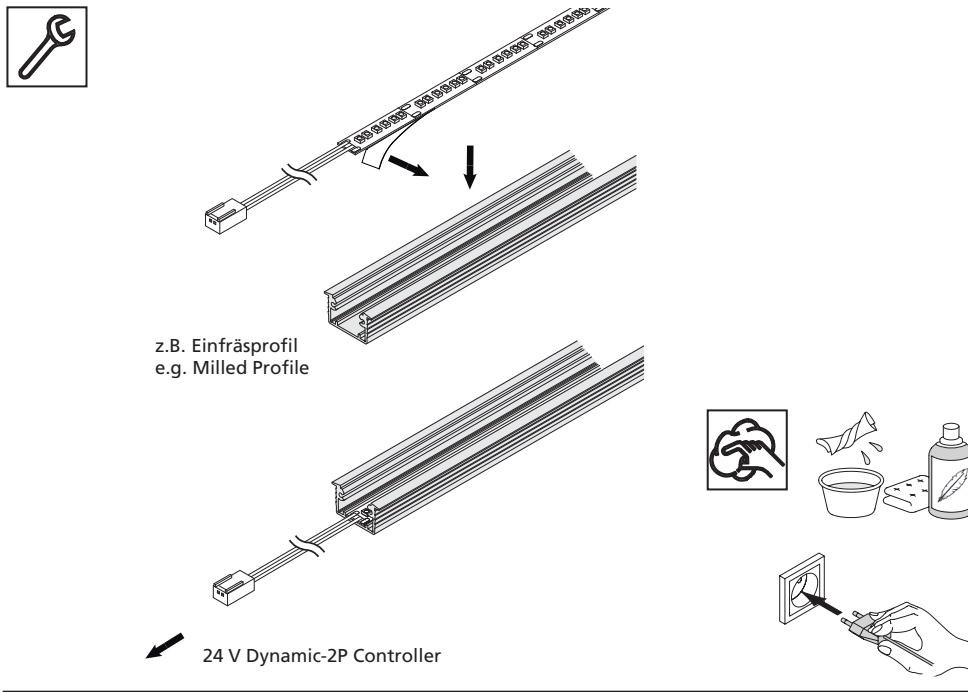
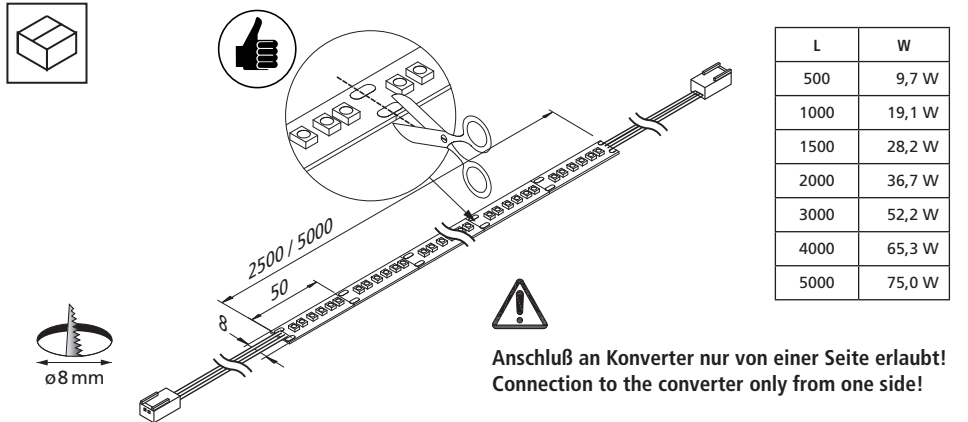


Dynamic-2P LED Tape 2x600 LED 2 Leitungen

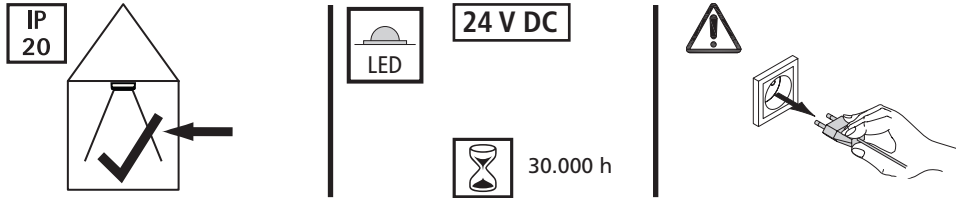

Montage- und Bedienungsanleitung

Hera LED Linienleuchte

Typ Dynamic-2P LED Tape 2x600 LED mit 2 Leitungen

Bestimmungsgemäße Verwendung

Selbstklebende, flexible LED Streifen mit einstellbarer Lichtfarbe zwischen 2700 K und 5000 K. Als Möbelleuchte gemäß VDE 0710 Teil 14/04.82 zum Einbau in Möbel zugelassen.



1. Beim Austausch von defekten Teilen dürfen nur Originalteile verwendet werden.
2. Alle Steckverbindungen immer bis zum Anschlag einführen.
3. Polung beachten (Aufdruck auf Dynamic-2P LED Tape)!
4. Anschluß an LED - Konverter nur nach Trennung der Tape von beiden Seiten möglich.
5. Die Lichtquelle dieser Leuchte ist nicht ersetzbar; wenn die Lichtquelle ihr Lebensdauerende erreicht hat, ist die gesamte Leuchte zu ersetzen.
6. Die Leuchte nicht demontieren da das Licht der Leuchtdioden das menschliche Auge verletzen kann.
7. Nur zum Anschluss an Hera LED Trafos 24V zugelassen: Tape mit einem Stecker (2-pol. Anschlussleitung) max. 100 W Ausgangsleistung und 24 V Dynamic-2P Controller, max. 75 W bzw. 5 m pro Anschlussleitung.
8. Werden andere als die angegebenen LED - Konverter eingesetzt, übernimmt Hera keine Gewährleistung.
9. Bei direkten Anschluss an einem Hera LED-Trafo (ohne Dynamic-2P Controller) stellt sich automatisch die Farbtemperatur 2700K ein.
10. Die Montageoberfläche muss glatt, sauber und trocken sein.



Entsorgen Sie elektrische Geräte nicht im Hausmüll, nutzen Sie die Sammelstellen in Ihrer Gemeinde. Wenn Sie das Gerät durch ein neues ersetzen, ist der Verkäufer gesetzlich verpflichtet, das alte mindestens kostenlos zur Entsorgung entgegenzunehmen.

Nachdruck auch auszugsweise verboten.

Erklärung der Symbole: <http://www.hera-online.de/de/fachliches.html>

Assembly and operating Instructions

Hera LED Linear Luminaire

Type Dynamic-2P LED Tape 2x600 LED with 2 supply cables

Intended use

Self-adhesive LED flexible strips with adjustable colour appearance between 2700 K and 5000 K. Approved as a furniture luminaire in accordance with VDE 0710 part 14/04.82 for installation in furniture.



1. Faulty parts should only be replaced with original parts.
2. Always fully insert all plug connections.
3. Observe the correct polarity (print on Dynamic LED Tape)!
4. Connection to the converter from both sides only possible after separation of the Tape.
5. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire must be replaced.
6. Do not disassemble the luminaire as the light diode can cause damage to the eyes.
7. Only approved for connection to Hera LED transformers 24V: Tape with single plug (2-pole supply cable) max. 100 W output power and 24 V Dynamic-2P Controller, maximum 75 W or 5 m per supply cable.
8. Hera grants no warranty when other LED converters as the prescribed converters are used.
9. If directly connected to a Hera LED converter (without Dynamic-2P controller) the colour temperature is set automatically to 2700K.
10. Installation surface must be smooth, clean and dry.



Do not dispose of electrical appliances in household waste, use separate collection facilities. When replacing old appliances with new ones, the retailer is obliged by law to accept to take back your old appliance for disposal free of charge.

Reproduction of this document in whole or part is forbidden.

Explanation of the Symbols: <http://www.hera-online.de/en/technical-information.html>

Hera® Hera GmbH & Co. KG
Dieselstraße 9
32130 Enger / Germany